




PRODUCTS CATALOGUE | 2015 2016

Cordless applicators





Type	Volume	D(mm)	L(mm)
CARTRIDGE	300 ml	50-51	215
CARTRIDGE	310 ml	50-51	218




ACCULIGHT II 300

Professional cordless applicator, powered by lithium-ion battery, for extrusion of sealant products of medium density at a temperature of 25 °C, dispensing in plastic and aluminium cartridges of 310ml. Delivered in the plastic case. (See pag.8).

Net Weight	1250g. (included battery)
Max. Force	300 Kgf - 2.941 N
Max. Speed	5,5 mm/sec
Speed Select	Trigger + Speed Wheel
Cartridges extruded (fully charged)	Nr. 80
Battery	7,4V (LI-ION Battery) - 1,3 A
Charging time	90 min.
Dripless	Yes



Type	Volume	D(mm)	L(mm)
CARTRIDGE	310 ml	50-51	218
SOFT-PACK	300 / 400 ml	50-51	270

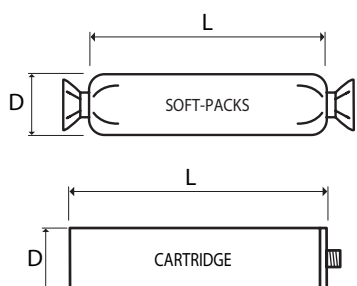

ACCULIGHT II 400

Professional cordless applicator, powered by lithium-ion battery, for extrusion of sealant products of medium density at a temperature of 25 °C, dispensing in plastic and aluminium cartridges 310 ml and soft-packs 300/400 ml. Delivered in the plastic case. (See pag.8).


Net Weight	1350 gr. Included battery
Max. Force	450 Kgf - 4.412 N
Max. Speed	5,5 mm/sec
Speed Select	Trigger + Speed Wheel
Cartridges/soft-pack extruded (fully charged)	Nr. 40
Battery	7,4V (LI-ION battery) - 1,3 A
Charging time	90 min.
Dripless	Yes



ACCULIGHT II 400 T

Professional cordless applicator, powered by lithium-ion battery, for extrusion of sealant products of medium density at a temperature of 25 °C, dispensing in plastic and aluminium cartridges 310 ml and soft-packs 300/400 ml. Delivered in the plastic case. (See pag.8).

Type	Volume	D(mm)	L(mm)
CARTRIDGE	310 ml	50-51	218
SOFT-PACK	300 / 400 ml	50-51	270

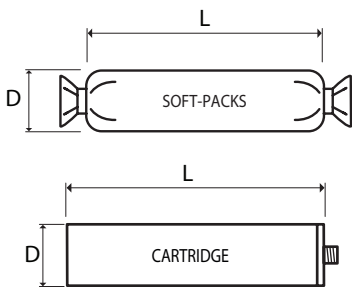


Net Weight	1350 gr. Included battery
Max. Force	450 Kgf - 4.412 N
Max. Speed	5,5 mm/sec
Speed Select	Trigger + Speed Wheel
Cartridges/soft-pack extruded (fully charged)	Nr. 40
Battery	7,4V (LI-ION battery) - 1,3 A
Charging time	90 min.
Dripless	Yes
Tube	in PET



ACCULIGHT II 600

Professional cordless applicator, powered by lithium-ion battery, for extrusion of sealant products of medium density at a temperature of 25 °C, dispensing in standard cartridges 310 ml and soft-packs 300/400/600 ml. Delivered in the plastic case. (See pag.8).


Type	Volume ml.	D(mm)	L(mm)
CARTRIDGE	310	50-51	218
SOFT-PACK	300/400/600	50-51	335

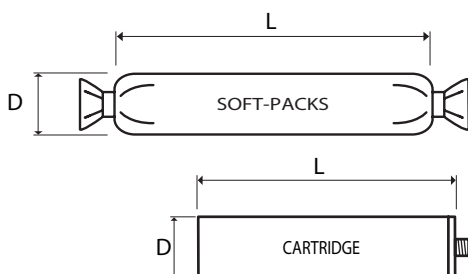

Net Weight	1400 gr. Included battery
Max. Force	450 Kgf - 4.412 N
Max. Speed	5,5 mm/sec
Speed Select	Trigger + Speed Wheel
Cartridges/soft-pack extruded (fully charged)	Nr. 30
Battery	7,4V (LI-ION) - 1,3 A
Charging time	90 min.
Dripless	Yes



Type	Volume ml.	D(mm)	L(mm)
CARTRIDGE	310	50-51	218
SOFT-PACK	300/400/600	50-51	335

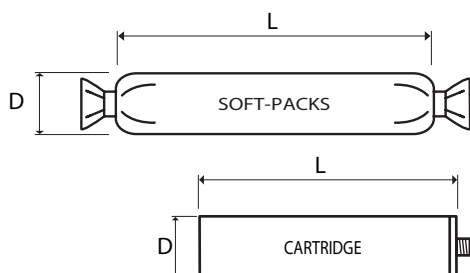

ACCULIGHT II 600 T


Professional cordless applicator, powered by lithium-ion battery, for extrusion of sealant products of medium density at a temperature of 25 °C, dispensing in standard cartridges 310 ml and soft-packs 300/400/600 ml.

Delivered in the plastic case. (See pag.8).

Net Weight	1400 gr. Included battery
Max. Force	450 Kgf - 4.412 N
Max. Speed	5,5 mm/sec
Speed Select	Trigger + Speed Wheel
Cartridges/soft-pack extruded (fully charged)	Nr. 30
Battery	7,4V (LI-ION) - 1,3 A
Charging time	90 min.
Dripless	Yes
Tube	in PET



Type	Volume	D(mm)	L(mm)
CARTRIDGE	150 ml 1:1 or 10:1	48-50	116
CARTRIDGE	220 ml 10:1	51	163
CARTRIDGE	300 ml 10:1	48-50	193
CARTRIDGE	310 ml 10:1	50-51	215
CARTRIDGE	330 ml 10:1	50-51	240



COAXIAL

ACCULIGHT II 310 CTX

Professional cordless applicator, powered by lithium-ion battery, for two component chemical anchor dispensing in coaxial cartridges 10:1.

Delivered in the plastic case. (See pag. 8).


Net Weight	1400 gr. Included battery
Max. Force	450 Kgf - 4.412 N
Max. Speed	4 mm/sec
Speed Select	Trigger + Speed Wheel
Cartridges extruded (fully charged)	Nr. 30
Battery	7,4V (LI-ION) - 1,3 A
Charging time	90 min.
Dripless	Yes



ACCULIGHT II 380 CTX

Professional cordless applicator, powered by lithium-ion battery, for two component chemical anchor dispensing in standard coaxial cartridges 380 ml.
Delivered in the plastic case. (See pag.8).

Type	Volume	D(mm)	L(mm)
CARTRIDGE	380 ml 1:1	63	185
CARTRIDGE	380 ml 2:1	63	185
CARTRIDGE	380 ml 10:1	63	185




COAXIAL

Net Weight	1500 gr. Included battery
Max. Force	450 Kgf - 4.412 N
Max. Speed	4 mm/sec
Speed Select	Trigger + Speed Wheel
Cartridges extruded (fully charged)	Nr. 30
Battery	7,4V (LI-ION) - 1,3 A
Charging time	90 min.
Dripless	Yes



ACCULIGHT II 345 BCX

Professional cordless applicator, powered by lithium-ion battery, for two component chemical anchor in side by side cartridges 345 ml.
Delivered in the plastic case. (See pag. 8).



SIDE BY SIDE


Net Weight	1600 gr. Included battery
Max. Force	450 Kgf - 4.412 N
Max. Speed	4 mm/sec
Speed Select	Trigger + Speed Wheel
Battery	7,4V (LI-ION) - 1,3 A
Charging time	90 min.
Dripless	Yes



ACCULIGHT II 411 BCX Extrusion 1:1

Professional cordless applicator, powered by lithium-ion battery, for two component dispensing in side by side cartridges 400 ml 1:1.

Delivered in the plastic case. (See pag. 8).



SIDE BY SIDE


Net Weight	1700 gr. Included battery
Max. Force	450 Kgf - 4.412 N
Max. Speed	4 mm/sec
Speed Select	Trigger + Speed Wheel
Battery	7,4V (LI-ION) - 1,3 A
Charging time	90 min.
Dripless	Yes



ACCULIGHT II 421 BCX Extrusion 2:1

Professional cordless applicator, powered by lithium-ion battery, for two component dispensing in side by side cartridges 400 ml 2:1.

Delivered in the plastic case. (See pag. 8).



SIDE BY SIDE


Net Weight	1700 gr. Included battery
Max. Force	450 Kgf - 4.412 N
Max. Speed	4 mm/sec
Speed Select	Trigger + Speed Wheel
Battery	7,4V (LI-ION) - 1,3 A
Charging time	90 min.
Dripless	Yes



ACCULIGHT II 585 BCX Extrusion 3:1

Professional cordless applicator, powered by lithium-ion battery, for two component chemical anchor dispensing in side by side cartridges 385/585 ml.

Delivered in the plastic case. (See pag. 8).



SIDE BY SIDE


Net Weight	1750 gr. Included battery
Max. Force	450 Kgf
Max. Speed	4 mm/sec
Speed Select	Trigger + Speed Wheel
Battery	7,4V (LI-ION) - 1,3 A
Charging time	90 min.
Dripless	Yes



ACCULIGHT II 611 BCX Extrusion 1:1

Professional cordless applicator, powered by lithium-ion battery, for two component dispensing in side by side cartridges 600 ml 1:1.

Delivered in the plastic case. (See pag. 8).



SIDE BY SIDE


Net Weight	1695 gr. Included battery
Max. Force	450 Kgf - 4.412 N
Max. Speed	4 mm/sec
Speed Select	Trigger + Speed Wheel
Battery	7,4V (LI-ION) - 1,3 A
Charging time	90 min.
Dripless	Yes

NEW



ACCULIGHT II 1500 BCX

Professional cordless applicator, powered by lithium-ion battery, for two component chemical anchor dispensing in side by side cartridges 1500 ml 1:1.
Delivered in the plastic case. (See pag. 8).



SIDE BY SIDE

Net Weight	2000 gr.
Max. Force	450 Kgf
Max. Speed	4 mm/sec.
Speed Select	Trigger + Speed Whee
Battery	7,4V (LI-ION) - 1,3 A
Charging time	90 min.
Dripless	Si

NEW



ACCUFIX

The rivet gun powered by lithium-ion battery, supplied in plastic case (see page 8), with nozzle kit and special keys.

Net Weight	1000 gr. batteria inclusa
Max. Force	750 Kgf - 7400 N
Power	24.5 W
Battery	7,4V (LI-ION) - 1,3 A
Charging time	90 min.

You can use the rivet gun with rivets of different size, thanks to the nozzles supplied in the kit:

NOZZLES	INCH		RIVETS
A	3/16"	>	4,8 mm
B	5/32"	>	4,0 mm
C	1/8"	>	3,2 mm
D	3/32"	>	2,4 mm



CB Universal battery charger

Suitable for all the models of Acculight applicators.

Input	AC 100-240 Volt 50Hz-60Hz
Output	DC 7,8 Volt 1,5 A
Net Weight	95 gr.

Available with CB / USA connector.



BA LI-ION Battery

Suitable for all the models of Acculight applicators.

Volt	7,4 Volt
Power	1,3 A
Type	LI-ION
Net Weight	110 g.



- Trigger with progressive regulator to adjust speed during the extrusion.
- Safety switch to block the trigger.



- Led light to make work easier in the dark areas.



- High efficiency screw transmission to improve the power of the motor and to reduce the consumption of the battery.



- Additional speed regulator with 6 positions.



- LI-ION Battery for long life without memory effect.
- Up to 50 cartridges with one charge.
- Fast recharge in less than 2 hours.

PRIVATE LABEL

Cordless Applicators



Private label is a customization service of the product, that P.M.T. provides to its customers. It is possible, upon request, to customize the applicators on the basis of your brand by applying your logo, the name and the description of the item. Many P.M.T. customers take advantage of our customization service for their products.



CASE PLASTIC CUSTOMIZABLE
with logo P.M.T. or its own brand,
through the process of laser etching.

Each applicator is supplied with a professional carrying case made of plastic, contains:



Battery	1 Pcs (The second battery is optional, to order separately) **
Net Weight	1000 g.
Charger	1 Pcs
Guaranty	12 months * from the date of sell
Istruction	Included

PACKAGING FOR PLASTIC CASE PMT IN SINGLE BOX

Single packing:

 48x10x37 cm  1 pz.
(For Acculight 300/400/600 models)

Multiple packing:

 50x50x40 cm  5 pz.
(For Acculight 300/400/600 models)

NOZZLES AVAILABLE FOR SOFT-PACK AND CARTRIDGES



NOZZLE for soft-pack



3080036



1060102



Ø
13
mm



Ø
9
mm



Ø
6
mm

ADAPTER for soft-pack

Thread 15 x 1,5



3080010

Thread 15 x 2,5



★ 3080225

For the extrusion of product contained in soft-pack and by using the following nozzles, use:

- Nr. 3 nozzles of different diameter



NOZZLES for aluminium cartridge

Threaded
15x1,5 mm



3080005



4020761



3080002



3080009

For the extrusion of product contained in soft-pack and by using the following nozzles, use:

**THE ADAPTER
FOR SOFT-PACK**
Cod. 3080010 #



ADAPTER for plastic cartridge

Threaded
15x2,5mm



1020054

NOZZLES for plastic cartridge

Threaded
15x2,5 mm



3080003



3080188



3080189



3080190

For the extrusion of product contained in soft-pack and by using the following nozzles, use:

**THE ADAPTER
FOR SOFT-PACK**
Cod. 3080225 ★



P.M.T. s.r.l.

Via Guglielmo Marconi 3/7 • 24051 Antegnate (BG) Italy

☎ +39 0363 905025 📠 +39 0363 905200 www.pmt.it info@pmt.it