




PRODUCTS CATALOGUE | 2015 2016

Manual applicators



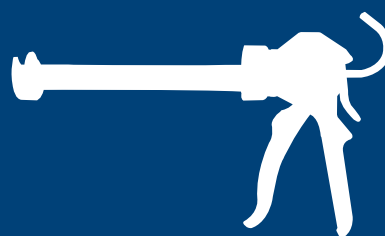

Type	Volume	D(mm)	L(mm)
CARTRIDGE	300 ml	50-51	215
CARTRIDGE	310 ml	50-51	218



CD P

Semi-professional handle gun "skeleton type", for low viscosity sealants and silicones, in cartridge.

Clutch	Steel - one piece
Push Rod	Hexagonal section
Max. Force	100 Kgf - 980 N
Thrust ratio	10:1
Progress/Stroke	6 mm
Weight	463 g.

The standard single packaging option is stated at page 15, point **1.**

Multiple packing: 36x20x30 cm 20 pcs. 9,5 kg.

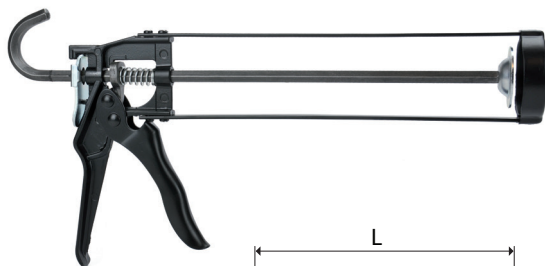

Type	Volume	D(mm)	L(mm)
CARTRIDGE	300 ml	50-51	215
CARTRIDGE	310 ml	50-51	218



CD T

Semi-professional handle gun "skeleton type", for low and medium viscosity sealants and silicones, in cartridge.

Clutch	Tempered
Push Rod	Tempered - Hexagonal section
Max. Force	120 Kgf - 1.176 N
Thrust ratio	10:1
Progress/Stroke	6 mm
Weight	480 g.
Features	Dripless system

The standard single packaging option is stated at page 15, point **1.**

Multiple packing: 36x20x30 cm 20 pcs. 9,6 kg.

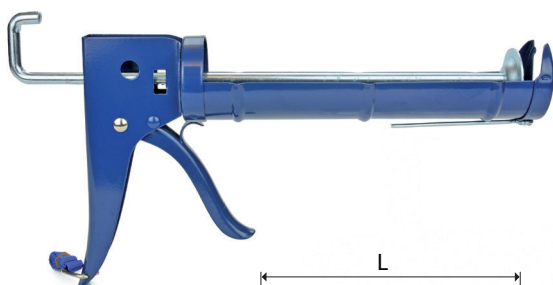

Type	Volume	D(mm)	L(mm)
CARTRIDGE	300 ml	50-51	215
CARTRIDGE	310 ml	50-51	218



CD C

Manual gun metal, for silicones in 310 ml rack cartridge

Push Rod	Rack
Max. Force	120 Kgf - 1.176 N
Thrust ratio	10:1
Progress/Stroke	14 mm
Weight	549 g.
Features	needle pierce nozzle

The standard single packaging option is stated at page 15, point **1.**

Multiple packing: 46,5x36x19 cm 20 pcs. 10 kg.

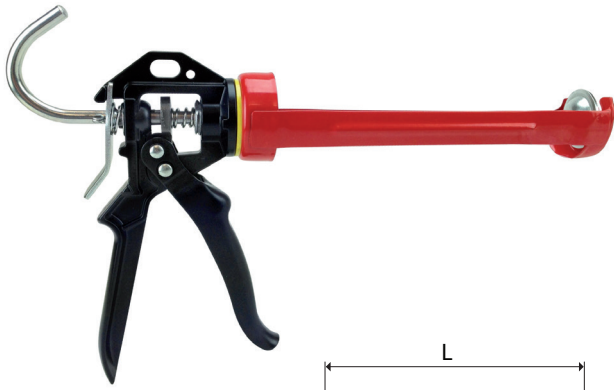

Type	Volume	D(mm)	L(mm)
CARTUCCIA	300 ml	50-51	215
CARTUCCIA	310 ml	50-51	218



PS 141

Semi-professional applicator with aluminum body, lever pressed steel and ergonomic handle. For sealants and adhesives to low viscosity in standard cartridge. Designed for optimum performance while maintaining good value for money.

Clutch	Tempered - one piece
Max. Force	150 Kgf - 1.470 N
Thrust ratio	14:1
Progress/Stroke	8,5 mm
Weight	688 g.
Features	Cradle steel rotating, electrowelded

The standard single packaging option is stated at page 15, point 1.

Multiple packing: 39x24,5x40 cm 20 pcs. 17,5 kg.

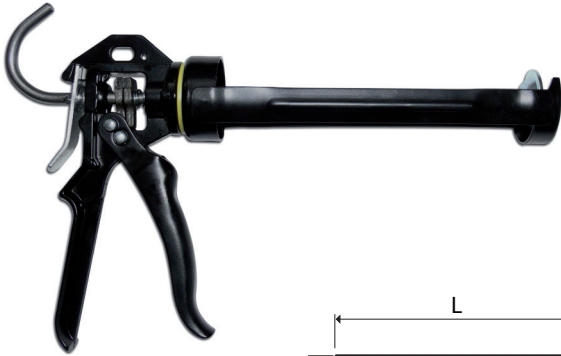

Type	Volume	D(mm)	L(mm)
CARTRIDGE	300 ml	50-51	215
CARTRIDGE	310 ml	50-51	218



PS 151

Professional applicator with aluminum body, lever pressed steel and ergonomic handle. For sealants and adhesives to low and medium viscosity in standard cartridge.

Clutch	Tempered - two pieces
Push Rod	Tempered
Max. Force	350 Kgf. - 3.432 N
Thrust ratio	18:1
Progress/Stroke	4,5 mm
Weight	850 g.
Features	Cradle steel rotating, electrowelded

The standard single packaging option is stated at page 15, point 1.

Multiple packing: 39x24,5x40 cm 20 pcs. 17,5 kg.

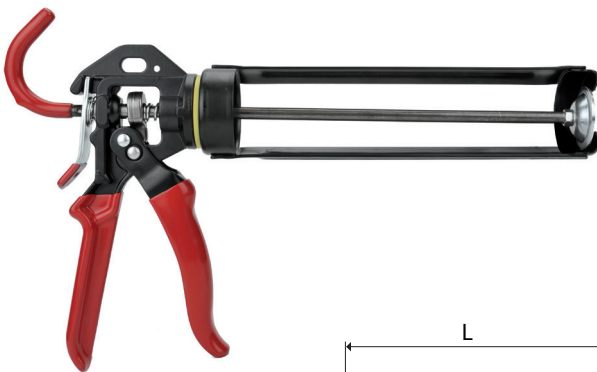

Type	Volume	D(mm)	L(mm)
CARTRIDGE	300 ml	50-51	215
CARTRIDGE	310 ml	50-51	218

PS 301

Professional applicator with aluminum body, lever pressed steel and ergonomic handle coated PVC. For sealants and adhesives to medium/high viscosity in standard cartridge.

Clutch	Tempered - one piece
Push Rod	Tempered
Max. Force	350 Kgf. - 3.432 N
Thrust ratio	18:1
Progress/Stroke	4,5 mm
Weight	860 g.
PVC softouch	4 point black or red
Features	Cradle steel rotating, electrowelded

The standard single packaging option is stated at page 15, point 1.

Multiple packing: 55x29x36 cm 20 pcs. 17,7 kg.

PS 310 MD


Metal professional applicator manual, for sealants and adhesives to high viscosity in standard cartridge.



Clutch	Tempered - one piece
Push Rod	Tempered
Max. Force	450 Kgf - 4.412 N
Thrust ratio	24:1
Progress/Stroke	4 mm
Weight	887 g.
PVC softouch	4 point black or red
Features	Locking clip cartridge

The standard single packaging option is stated at page 15, point 1.
Multiple packing: 55x29x36 cm 12 pcs. 10,6 kg.

Type	Volume	D(mm)	L(mm)
CARTRIDGE	300 ml	50-51	215
CARTRIDGE	310 ml	50-51	218




PS 250T

Professional applicator with grip coated with PVC and transparent tube for the control of extrusion of the product in use.



Clutch	Tempered - one piece
Push Rod	Tempered
Max. Force	350 Kgf. - 3.432 N
Thrust ratio	18:1
Progress/Stroke	4,5 mm
Weight	830 g.
Tube	in PET
PVC softouch	4 point black

The standard single packaging option is stated at page 15, point 1.
Multiple packing: 54x24x29 cm 10 pcs. 17,5 kg.



*** IN ADDITION OPTIONAL**
for products in soft-pack
THE KIT PS 250 T:
• **Piston** cod. 3080076
• **Cone** cod. 3080077

Type	Volume	D (mm)	L (mm)
CARTRIDGE	310 ml	50-51	218
SOFT-PACK	300 ml	50-51	180





PS 265



PS 265 T

Type	Volume	D(mm)	L(mm)
CARTRIDGE	310 ml	50-51	218
SOFT-PACK	300-400 ml	50-51	230


PS 265 - PS 265 T (18:1)

Professional applicator with grip coated with PVC and aluminium ring nuts, specially designed for medium and high viscosity sealants products. Also available with transparent tube (PS265 T) for control of extrusion of the product in use.

Clutch	Tempered - one piece
Push Rod	Tempered
Max. Force	350 Kgf. - 3.432 N
Thrust ratio	18:1
Progress/Stroke	4,5 mm
Weight	1010 g.
Tube	in PET (265 T)
PVC softouch	4 point black or red
Features	Aluminium tube and ring nuts

The standard single packaging option is stated at page 15, point 1.

Multiple packing: 58x33x24 cm 12 pcs. 14,3 kg.

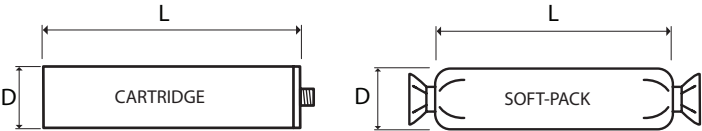

PS 265 MD (24:1)


The PS 265 is also available with pressure ratio 24: 1.

Clutch	Tempered - one piece
Push Rod	Tempered
Max. Force	450 Kgf - 4.412 N
Thrust ratio	24:1
Progress/Stroke	4,5 mm
Weight	1010 g.
PVC softouch	4 point black
Features	Aluminium tube and ring nuts

The standard single packaging option is stated at page 15, point 1.

Multiple packing: 58x33x24 cm 12 pcs. 14,3 kg.

Type	Volume	D(mm)	L(mm)
CARTRIDGE	310 ml	50-51	218
SOFT-PACK	300-400 ml	50-51	230

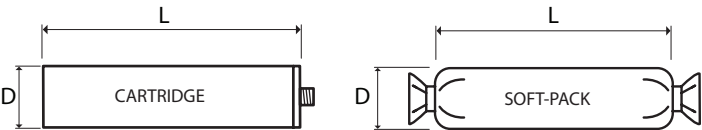



PS 395



PS 395 T


Type	Volume	D(mm)	L(mm)
CARTRIDGE	310 ml	50-51	218
SOFT-PACK	300/400/600	50-51	335

PS 395 - PS 395 T (18:1)

Professional applicator with ergonomic grip coated with PVC and aluminium ring nuts, specially designed for high viscosity sealants products. Also available with transparent tube (PS395 T) for control of extrusion of the product in use.

Clutch	Tempered - one piece
Push Rod	Tempered
Max. Force	350 Kgf. - 3.432 N
Thrust ratio	18:1
Progress/Stroke	4,5 mm
Weight	1170 g.
Tube	in PET (395 T)
PVC softouch	4 point black or red
Features	Aluminium tube and ring nuts

The standard single packaging option is stated at page 15, point 1.
 Multiple packing PS/395: 65x34x24 cm 12 pcs. 15 kg.
 Multiple packing PS/395 T: 65x34x24 cm 10 pcs. 12 kg.

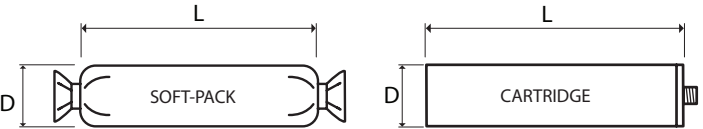


PS 395 MD (24:1)

The PS 395 is also available with pressure ratio 24: 1.

Clutch	Tempered - one piece
Push Rod	Tempered
Max. Force	450 Kgf - 4.412 N
Thrust ratio	24:1
Progress/Stroke	4,5 mm
Weight	1170 g.
PVC softouch	4 point black
Features	Aluminium tube and ring nuts

The standard single packaging option is stated at page 15, point 1.
 Multiple packing: 65x34x24 cm 12 pcs. 15 kg.

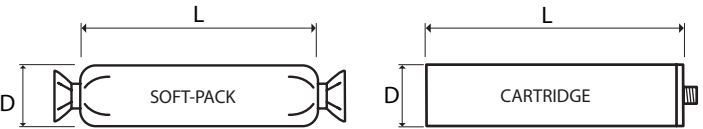

Type	Volume	D(mm)	L(mm)
CARTRIDGE	310 ml	50-51	218
SOFT-PACK	300/400/600	50-51	335

CTX 300 MD

Professional applicator with ergonomic grip coated with PVC, for high viscosity products and chemical anchor, in coaxial cartridge.




Clutch	Tempered - one piece
Push Rod	Tempered
Max. Force	450 Kgf - 4.412 N
Thrust ratio	24:1
Progress/Stroke	3 mm
Weight	1230 g.
PVC softouch	3 point black or red

Type	Volume	D(mm)	L(mm)
CARTRIDGE	150 ml 1:1or 10:1	48-50	116
CARTRIDGE	220 ml 10:1	51	163
CARTRIDGE	300 ml 10:1	48-50	193
CARTRIDGE	310 ml 10:1	50-51	215
CARTRIDGE	330 ml 10:1	50-51	240


The standard single packaging option is stated at page 15, point 1.

Multiple packing: 51x32,5x32 cm 20 pcs. 23,3 kg.



CTX 400 MD

Professional applicator with ergonomic grip coated with PVC, for high viscosity products, chemical anchor, in coaxial cartridge.

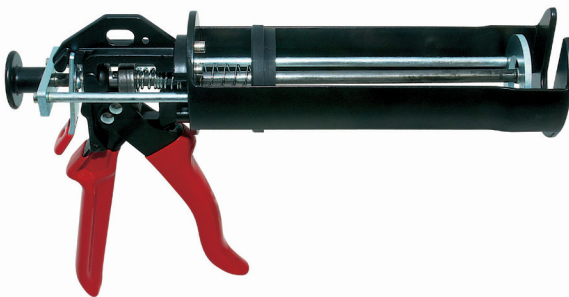


Clutch	Tempered - one piece
Push Rod	Tempered
Max. Force	450 Kgf - 4.412 N
Thrust ratio	24:1
Progress/Stroke	3 mm
Weight	1250 g.
PVC softouch	3 point black or red

Type	Volume	D(mm)	L(mm)
CARTRIDGE	380 ml 1:1	63	185
CARTRIDGE	380 ml 2:1	63	185
CARTRIDGE	380 ml 10:1	63	185

The standard single packaging option is stated at page 15, point 1.

Multiple packing: 39x34x25 cm 10 pcs. 12,5 kg.





Type	Volume	D(mm)	L(mm)
CARTRIDGE	2x100ml 1:1	—	150


BCX 101

Professional applicator with grip coated with PVC, for sealants and adhesives in two-component cartridges 2x100. ml.

Clutch	Tempered - one piece
Push Rod	Tempered
Max. Force	350 Kgf. - 3.432 N
Thrust ratio	18:1
Progress/Stroke	4,5 mm
Weight	1290 g.
PVC softouch	3 point black or red

The standard single packaging option is stated at page 15, point 1.

Multiple packing: 41x31x20 cm 6 pcs. 8 kg.



SIDE BY SIDE



Type	Volume	D(mm)	L(mm)
CARTRIDGE	2x100ml 1:1	—	185


BCX 100

Professional applicator with ergonomic grip coated with PVC, for sealants and adhesives with high viscosity, in two-component cartridges.

Clutch	Tempered - one piece
Push Rod	Tempered
Max. Force	350 Kgf. - 3.432 N
Thrust ratio	18:1
Progress/Stroke	4,5 mm
Weight	1290 g.
PVC softouch	3 point black or red

The standard single packaging option is stated at page 15, point 1.

Multiple packing: 41x31x20 cm 6 pcs. 8 kg.



SIDE BY SIDE



Type	Volume	D(mm)	L(mm)
CARTRIDGE	2x200ml 1:1	—	185


BCX 200 MD

Professional applicator with ergonomic grip coated with PVC and reinforced body, for sealants and adhesives with high viscosity, in two-component cartridges.

Clutch	Tempered - two pieces
Push Rod	Tempered
Max. Force	450 Kgf - 4.412 N
Thrust ratio	24:1
Progress/Stroke	3 mm
Weight	1730 g.
PVC softouch	4 point black or red

The standard single packaging option is stated at page 15, point 1.

Multiple packing: 53x45x25 cm 10 pcs. 17,3 kg.



SIDE BY SIDE

BCX 221


Professional applicator with ergonomic grip coated with PVC, for use of high viscosity products, sealants and adhesives, two-component cartridges in 2: 1-1: 1 200 ml.



Clutch	Tempered - one piece
Push Rod	Tempered
Max. Force	350 Kgf. - 3.432 N
Thrust ratio	18:1
Progress/Stroke	4,5 mm
Weight	1290 g.
PVC softouch	3 point black or red

The standard single packaging option is stated at page 15, point 1.

Multiple packing: 30x29x26 cm 6 pcs. 8 kg.

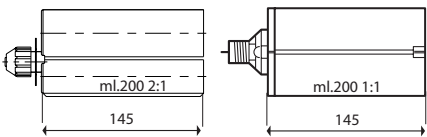

SIDE BY SIDE

BCX 300 MD


Professional applicator with ergonomic grip coated with PVC and reinforced body, for sealants and adhesives with high viscosity, in two-component cartridges.



Clutch	Tempered - two pieces
Push Rod	Tempered
Max. Force	450 Kgf - 4.412 N
Thrust ratio	24:1
Progress/Stroke	3 mm
Weight	1740 g.
PVC softouch	4 point black or red

The standard single packaging option is stated at page 15, point 1.

Multiple packing: 53x45x25 cm 10 pcs. 17,4 kg.



SIDE BY SIDE

Type	Volume	D(mm)	L(mm)
CARTRIDGE	2x300ml 1:1	—	216

BCX 345 MD


Professional applicator with ergonomic grip coated with PVC, for high viscosity products and chemical anchor in two-component cartridges.



Clutch	Tempered - one piece
Push Rod	Tempered
Max. Force	450 Kgf - 4.412 N
Thrust ratio	24:1
Progress/Stroke	4,5 mm
Weight	1040 g.
PVC softouch	3 point black or red

The standard single packaging option is stated at page 15, point 1.

Multiple packing: 41x31x20 cm 12 pcs. 13 kg.



SIDE BY SIDE




BCX 385 MD

Professional applicator with ergonomic grip coated with PVC and cradle with side loading, for high viscosity chemical products, in two-component cartridges.


Clutch	Tempered - two pieces
Push Rod	Tempered
Max. Force	450 Kgf - 4.412 N
Thrust ratio	24:1
Progress/Stroke	3 mm
Weight	1250 g.
PVC softouch	3 point black or red

The standard single packaging option is stated at page 15, point 1.

Multiple packing: 47x45x25,5 cm 10 pcs. 12,5 kg.



SIDE BY SIDE



SIDE BY SIDE



BCX 585 MD






Professional applicator with ergonomic grip coated with PVC and cradle with side loading, for high viscosity chemical products, in two-component cartridges.

Clutch	Tempered - one piece
Push Rod	Tempered
Max. Force	450 Kgf - 4.412 N
Thrust ratio	24:1
Progress/Stroke	3 mm
Weight	1350 g.
PVC softouch	3 point black or red

The standard single packaging option is stated at page 15, point 1.

Multiple packing: 53x45x25 cm 10 pcs. 13,5 kg.

SIDE BY SIDE

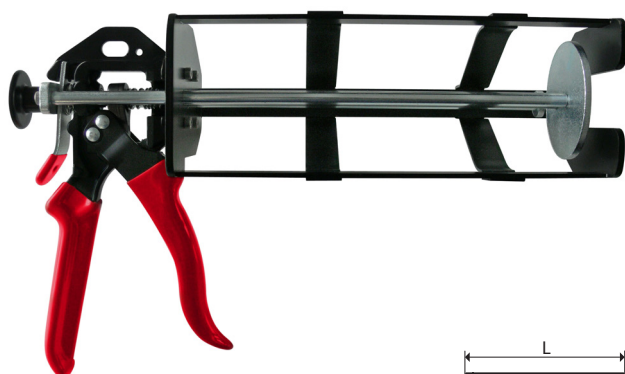


BCX 825 MD

Professional applicator with ergonomic grip coated with PVC and cradle with side loading, for high viscosity chemical products, in two-component cartridges.

Clutch	Tempered - one piece
Push Rod	Tempered
Max. Force	450 Kgf - 4.412 N
Thrust ratio	24:1
Progress/Stroke	3 mm
Weight	1400 g.
PVC softouch	3 point black or red

Type	Volume	D(mm)	L(mm)
CARTUCCIA	825ml 10:1	—	216



SIDE BY SIDE

The standard single packaging option is stated at page 15, point 1.

Multiple packing: 53x45x25 cm 10 pcs. 13,5 kg.



PMS

Applicator for bulk products specially developed for low and medium viscosity materials and grouting.

Push Rod	Tempered
Application	For bulk products
Max. Force	350 Kgf - 3.432 N
Thrust ratio	18:1
Nozzle	Two different nozzles plastic
Tube	In PVC, capacity 1 L
Weight	1.950 g.

The standard single packaging option is stated at page 15, point **3**.



PMX

Applicator for silicones and sealants products, also two-component, contained in drums of Ø 29 - 23,5 cm. Thanks to the dedicated and hard pusher piston draws directly the product contained in the bins.

The Kit includes:

- Applicator with special piston,
- Special adapter nozzles,
- Nr. 3 nozzles of different diameter

DISCS PLUNGERS OPTIONAL

THE DISCS PUSHERS ARE NEEDED TO DRAW THE BULK BINS AND LOAD THE GUN, SIZES AVAILABLE: 1) 29 cm E 2) 23,5 cm




Clutch	Tempered - one piece
Push Rod	Tempered
Max. Force	350 Kgf - 3.432 N
Thrust ratio	18:1
Progress/Stroke	4,5 mm
Weight	1170 g.
PVC softouch	4 point black
Features	Aluminium tube and ring nuts





The standard single packaging option is stated at page 15, point **3**.



* optional plungers

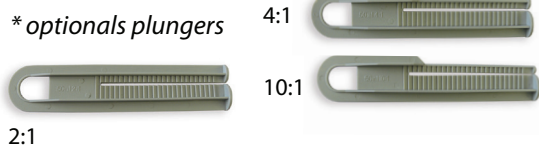

SIDE BY SIDE



BI 50

Applicator to apply and extrude adhesives contained in two-component standard cartridges 25 + 25 g. With plunger 1:1.

Material	Full plastic
Mixing ratio	1:1
Progress/Stroke	
Weight	150 g.
Plungers (optional)*	2:1 - 4:1 - 10:1

The standard single packaging option is stated at page 15, point 3.

Multiple packing: 58x22x41 cm 25 pcs. 4 kg.

BI 60

Applicator to apply and extrude adhesives contained in two-component standard cartridges 25 + 25 g.


Material	Metal body, plastic cartridge holder
Mixing ratio	1:1
Progress/Stroke	6,5 mm
Peso	430 g.

The standard single packaging option is stated at page 15, point 3.

Multiple packing: 42x31x48,5 cm 25 pcs. 11 kg.



SIDE BY SIDE



BX 70 (1:1)

Applicator to apply and extrude adhesives contained in two-component standard cartridges 25 + 25 g.


Material	Plastic body, metal cartridge holder
Mixing ratio	1:1 and 2:1
Progress/Stroke	8 mm
Peso	450 g.

The standard single packaging option is stated at page 15, point 1.

Multiple packing: 36x31x30 cm 20 pcs. 5 kg.




SIDE BY SIDE



ALSO AVAILABLE
APPLICATOR "BX 70 (2:1)"
MIXING WITH 2: 1



SIDE BY SIDE



NOZZLES AVAILABLE FOR SOFT-PACK AND CARTRIDGES



NOZZLE for soft-pack



3080036



1060102



Ø
13
mm



Ø
9
mm



Ø
6
mm

ADAPTER for soft-pack

Thread 15 x 1,5



3080010

Thread 15 x 2,5



★ 3080225

For the extrusion of product contained in soft-pack and by using the following nozzles, use:

- Nr. 3 nozzles of different diameter



NOZZLES for aluminium cartridge

Threaded
15x1,5 mm



3080005



4020761



3080002



3080009

For the extrusion of product contained in soft-pack and by using the following nozzles, use:

**THE ADAPTER
FOR SOFT-PACK**
Cod. 3080010 #



ADAPTER for plastic cartridge

Threaded
15x2,5mm



1020054

NOZZLES for plastic cartridge

Threaded
15x2,5 mm



3080003



3080188




3080189



3080190

For the extrusion of product contained in soft-pack and by using the following nozzles, use:

**THE ADAPTER
FOR SOFT-PACK**
Cod. 3080225 ★

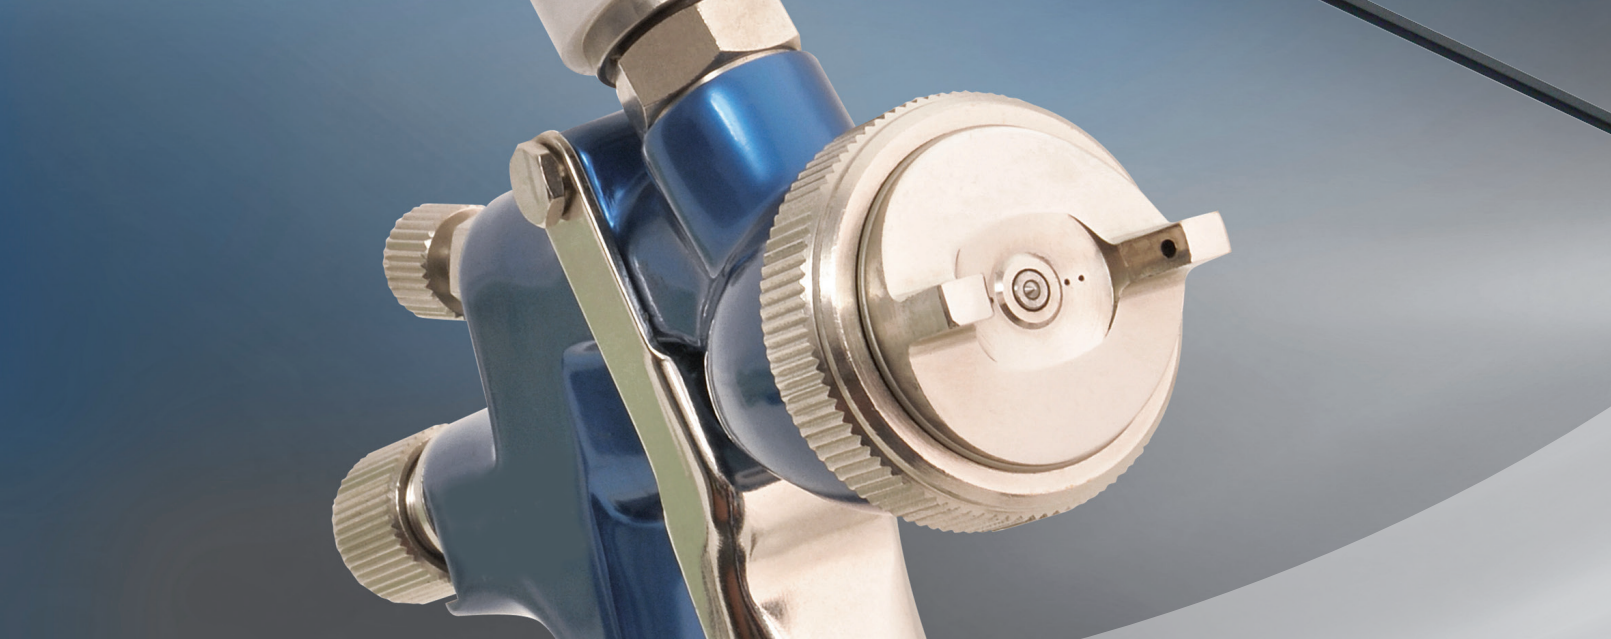

Private Label is a CUSTOMIZATION SERVICE of the product, that P.M.T. provides to its customers. It is possible, upon request, to customize the applicators on the basis of your Brand by applying your logo, the name and the description of the item. Many P.M.T. customers take advantage of our customization service for their products.

LOGO

Thanks to the Private Label service, you will be able to have on both plastic and metal components a laser marking or a pad printing with your corporate Logo. As an alternative, we can customize the products with labels with printed Logo.



COLOR

Keeping the style of your Brand realize individual components in the desired color, such as the handle or components of metal there avvaliamo special treatment as the anodizzazione and specific paint. We employ the best people to ensure a unique and captivating.



PERSONALIZZATO
CUSTOMIZED
ETICHETTE
LABELS
LASERATURA
LASER MARKING





PRIVATE LABEL

The main objective of our company is to provide **QUALITY PRODUCTS** whilst securing a **HIGH PROFESSIONALISM**, in addition to this we give the opportunity to our customers **CUSTOMIZE** the product, making **EXCLUSIVE MARKET** and easily distinguishable.

PACKAGING

Our Private Label service can be realized also for the packaging. Customers may require personalized boxes or labels in color or in black and white.

1. PVC BAG, WITH GENERIC LABEL
2. PVC BAG, WITH CUSTOMIZED LABEL
3. NEUTRAL PACKAGING, WITH GENERIC LABEL
4. NEUTRAL PACKAGING, WITH CUSTOMIZED LABEL
5. CUSTOMIZED PACKAGING, WITH **P.M.T.** LAYOUT
6. CUSTOMIZED PACKAGING ,WITH LAYOUT **WITH YOUR LOGO**



7. CASE PLASTIC CUSTOMIZABLE WITH LOGO P.M.T. OR ITS OWN BRAND, THROUGH THE PROCESS OF LASER ETCHING OR LABEL.
FOR CORDLESS APPLICATORS and SPRAY GUNS SP 2015 SSP





P.M.T. s.r.l.

Via Guglielmo Marconi 3/7 • 24051 Antegnate (BG) Italy

☎ +39 0363 905025 📠 +39 0363 905200 www.pmt.it info@pmt.it